



DC30-20C DIRECTIONAL COUPLER

Features:

- Lowest Loss and VSWR
- Custom Designs Available
- Surface Mounted
- Low Cost
- Available on Tape and Reel

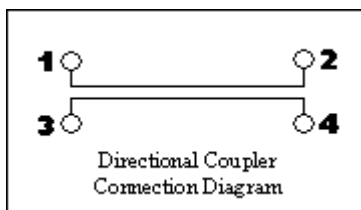

Outline Drawing

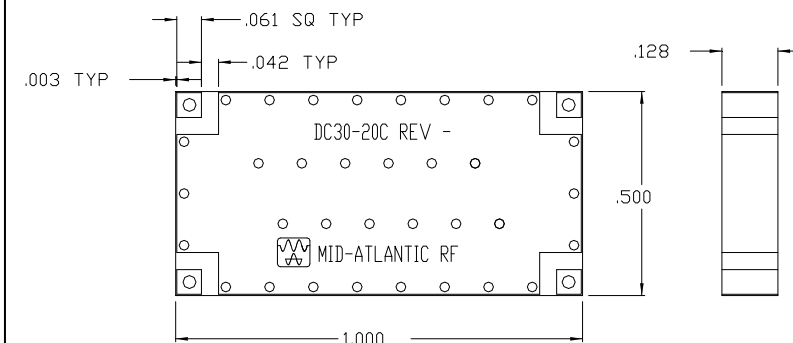

All dimensions in inches



Electrical Specifications:

Center Frequency: 330 +/- 25 MHz

Coupling (nom.): 20dB nominal

Coupling Variation: 1.5dB max
225 to 450 MHz

VSWR: 1.25:1

Insertion Loss: 0.25dB max

Power Handling: 150W

Mechanical Specifications:

Dimensions: 1.000" x 0.500" x 0.128"

Mounting: Surface

Environmental Specifications:

Operating Temperature: -55°C to +90°C

